


AL8 LED AL4 LED

Working voltage:	100~250V
Frequency:	50/60Hz
Peak Wavelength:	365nm
Radiation intensity:	101.8 $\mu\text{w}/\text{cm}^2/1\text{m}$
Wattage:	AL8: 8W, AL4: 4W
Light transmittance rate	>L95
Driver type:	External isolated constant current driver
Qty. of LED bulb:	AL8: 8pcs, AL4: 4pcs
Insulation:	AC1500V/5mA
Flame retardant grade:	UL94V-0
Environmental certificate:	RoHS
Surge voltage:	2KV
Working temperature:	-20~+50 °C
Dimensions:	AL8: 280x17.8x14.5mm AL4: 160x17.8x14.5mm
Comply with:	EMC/LVD/RoHS/CE




Flexible connection

By utilizing efficient UVA LEDs and external driver, we achieve miniaturization, extendibility, and flexible connection for LED tubes, providing new product design possibilities for fly trap designers and enabling multi-angle attraction.

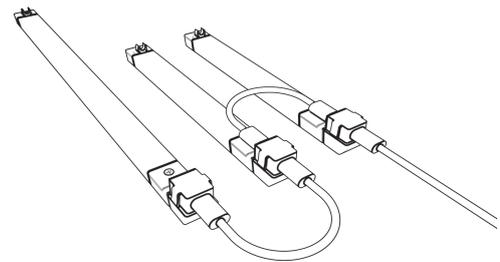

Achieve flexible connections by using USB cables

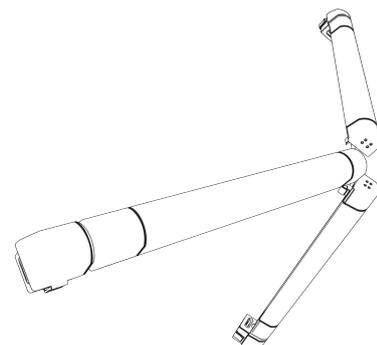

The small-sized ILED tubes and USB connection provide more freedom and possibilities for the fly trap product design.